

Facestock

A white, corona-treated polyethylene film .

Basis Weight	92 g/m ²	ISO 536
Caliper	93 µm	ISO 534

Adhesive

A special purpose extra permanent, rubber based adhesive.

Liner

BG45 white, a supercalendered glassine paper.

Basis Weight	71 g/m ²	ISO 536
Caliper	63 µm	ISO 534
Transparency	50 %	DIN 53147

Laminate

Total Caliper	176 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	20 N/25mm	FTM 9 Glass
Peel Adhesion 90°	12 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service temperature	-20°C to 80°C	

Adhesive Performance

S277 is an highly aggressive permanent adhesive with excellent tack and adhesion to a wide variety of substrates including rough and apolar substrates.

Applications and use

Applications are predominantly in home and personal care, as well as industrial goods. Due to its flexibility the product is especially suitable for squeezable bottles and other flexible containers. A robust film, allowing reliable dispensing of large labels and complex label shapes

Conversion & printing

The corona treated face material can be printed by conventional printing techniques including flexo, screen, offset, letterpress, silkscreen, gravure, and hot or cold foiling processes. UV, water-based and solvent-based inks can be used. On-press corona treatment is recommended for optimum ink adhesion. The face material is suitable for Thermal Transfer printing. Exact inks, foils and ribbons should be specified by your ink/foil/ribbon supplier.



Special Approvals

S227 complies with European food regulation 1935/2004/EC, with the German Recommendation (BfR) XXI and with FDA § 175.105.R. In accordance with the requirements of relevant EU food regulations, the adhesive S227 may safely stand in direct contact dry, moist and non-fatty foodstuffs.

This product complies with the materials section of BS5609 Part 2 (Marine Performance Test). Purchasers should independently determine the compliance or otherwise of the ink and print process involved in the production of labels to the British standard.

AF170

Fasson ® PE100 WHITE - S277-BG45WH IMP

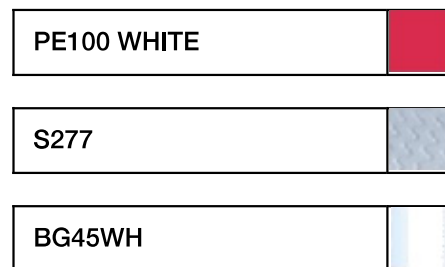



Inspired Brands.
Intelligent World.™

Shelf life

Two years under storage conditions as defined by FINAT (20-25°C; 40-50%RH)

All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended. If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com

Avery Dennison Materials Group Europe

Willem Einthovenstraat 11
2342 BH Oegstgeest
The Netherlands
+31 (0)85 000 2000

Warranty

All Avery Dennison statements, technical information and recommendations are based on tests believed to be reliable but do not constitute a guarantee or warranty. All Avery Dennison products are sold with the understanding that purchaser has independently determined the suitability of such products for its purposes.

Avery Dennison products are warranted to be free of defects in material or workmanship for a period of one year from the date of shipment. Should a defect be communicated to Avery Dennison within that time frame, Avery Dennison will evaluate and determine the existence of the defect and further decide, at its sole discretion, to either replace the defective product without charge or compensate it with a credit note in such amount as Avery Dennison deems reasonable. Avery Dennison shall have no responsibility beyond the replacement value of the defective product nor shall in any way be liable or responsible for consequential or incidental damages.



ANY OTHER WARRANTY, WHETHER EXPRESS OR IMPLIED, OR WHETHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE OR OTHERWISE, SHALL BE EXCLUDED. NO WAIVER, ALTERATION, ADDITION OR MODIFICATION OF THE FOREGOING CONDITIONS SHALL BE VALID UNLESS MADE IN WRITING AND SIGNED BY AN EXECUTIVE OFFICER OF AVERY DENNISON.

©2013 Avery Dennison Corporation. All rights reserved. Avery Dennison and all other Avery Dennison brands, this publication, its content, product names and codes are owned by Avery Dennison Corporation. All other brands and product names are trademarks of their respective owners. This publication must not be used, copied or reproduced in whole or in part for any purposes other than marketing by Avery Dennison.